


# DYNAMAX™

## 12- STRAND

Twelve strand braided rope, made from DYNEEMA™ HMPE grade SK 75, has the highest strength to weight ratio in the current range of braided ropes.

- **Light weight – floats**
- **High strength – similar, size for size, to wire rope**
- **Torque balanced 12 strand braided construction**
- **Abrasion resistant polyurethane coating**

Dia. mm	Weight kg/100m	MBL* Tonnes
6	2,3	4
8	3,9	6
10	5,8	9
12	8,3	13
14	11,3	18
16	14,7	23
18	18,6	26
20	23,0	29
22	27,8	44
24	33,2	52
26	39,0	61
28	45,2	71
30	51,9	81
32	59,0	92
34	63,9	100
36	71,4	112
38	79,9	125
40	88,2	138
44	106,7	153
48	126,5	167

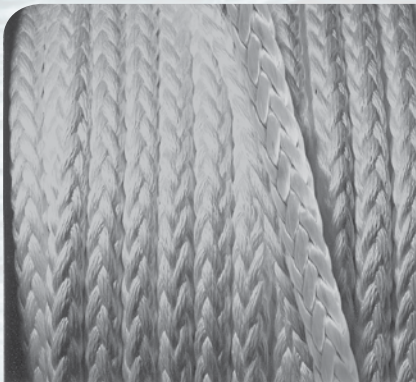

## FACTS

Melting point	135 °C
Spec. Gravity	0,97
Water absorption	0%
Reduction of MBL when wet	0%
Bending Ratio, Dynamic ISO 3730	9:1
Elongation, new rope	5%
Elongation, broken-in ropes (15-20 operations)	3%
On request, larger diameter, different. color, 12 strand	